

QuickStyle

by **atkar**group

Acoustic Panels

Cost-effective. Stylish. Quick 10 day lead times.

Order online at atkar.com.au/quickstyle

SOLID
SLOTTED
PERFORATED
FIRE RATED



Acoustic panels with upfront pricing and standard sizes

QuickStyle by Atkar Group is a cost-effective acoustic solution for projects where style and aesthetic are paramount, but timelines and budgets are limited.

Available in standard panel sizes only with a range of profiles and finishes, QuickStyle panels are easy to install and offer short lead times.

- ✓ 10 day lead times
- ✓ Upfront pricing
- ✓ Easy online ordering
- ✓ Popular profiles & finish options
- ✓ Group 1 & 2 Fire Rated options

QuickStyle tip

Solid panels can be cut to size and used as a border or feature to fit your design.

QuickStyle Panel Selection

It's easy to order or specify your QuickStyle panels.

Step 1: Substrate

Choose base substrate

Panel Sizes: 2400mm x 1200mm x 12mm

Step 2: Profile

Choose panel profile

	Panel Type	Hole Size	Centres	Pattern	Open Area %	NRC Rating*
QS6/125/S	Perforated	6mm	12.5mm	Square	17.26%	0.70
QS6/25/D	Perforated	6mm	25mm	Diamond	8.62%	0.55
QS10/25/D	Perforated	10mm	25mm	Diamond	23.98%	0.80
QS10/25/S	Perforated	10mm	25mm	Square	12.18%	0.60
	Panel Type	Slot Length	Centres	Slot Width	Open Area %	NRC Rating*
QS26/127/50	Slotted	260mm	50mm	12.7mm	21.78%	0.70
QS110/100/25	Slotted	110mm	25mm	10mm	28.46%	0.75
	Panel Type					
QS Solid	Solid					

*NRC Ratings are indicative only.

Step 3: Finish Colour

Choose from our QuickStyle colour range

- > Limed Hoop Pine
- > Hoop Pine
- > Tasmanian Oak
- > Planked Oak
- > Tasmanian Blackwood
- > American Oak
- > Euro Beech
- > Rock Maple
- > Australian Blackbutt
- > Spotted Gum
- > American Walnut
- > Royal Cherry
- > Black
- > Silver
- > White

Colour range details and sample requests available from our website.

Step 4: Add Optional Extras

- Finished Edge** Add optional finish colour to all edges of the panel. Additional 5 day lead time required.
- QuickStrips** Flat black backing strips to use behind the expressed joint to conceal the framing system behind panels.
- Panel Screws** Suitable for fixing panels to timber battens and steel under 1mm.

MDF Standard

MDF Fire Retardant

Group 2 Fire Rating
(Perforated/Slotted Panels)
Group 1 Fire Rating (Solid Panels)


MDF Black Standard

MDF Black Fire Retardant


Group 1 Fire Rating
(Solid Panels)




QS6/125/S

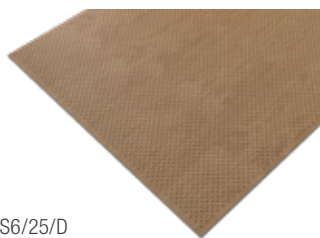


QS6/25/D

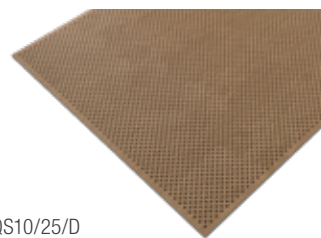


QS10/25/D



QS10/25/S

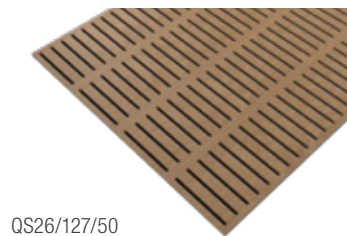

QS26/127/50

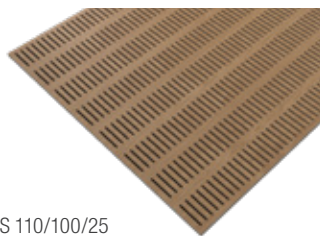

QS 110/100/25



QS Solid (infill panel)



Limed Hoop Pine



Hoop Pine




Tasmanian Oak



Planked Oak



Tasmanian Blackwood



American Oak




Euro Beech



Rock Maple



Australian Blackbutt



Spotted Gum




American Walnut*




Royal Cherry*



Black*



Silver*



White*

*MDF Black substrate is recommended for these colours.

Included Features

- Acoustic Backing** Sonus Acoustic Backing 1.0
- Fixings** Face fix only. Colour matched screw decals provided.
- Panel Margins** Perforated panel: 25mm from panel edge to hole centre.
Slotted panel: 20mm from panel edge to slot.
- Panel Edging** No finished edge. Option to add available.

QuickStyle
by atkargroup

INSTALLATION

Installation Overview

The following installation advice is for all QuickStyle panels using a face fix method with a 10mm Expressed Joint.

PANEL LAYOUT & DESIGN

Confirm panel layout prior to commencing project. Panels can be installed to ceilings or walls in either a horizontal or vertical direction. You can use solid infill panels, together with perforated or slotted panels, to ensure layout meets your exact wall or ceiling size requirements. See page 7 or visit QuickStyle website for design & layout ideas.

FRAMING & JOINTING

QuickStyle panels are to be installed to a concealed suspended ceiling grid or directly to timber or steel wall battens. Ensure framework is even and level.

Maximum spacing between furring channels or battens is to be 600mm and a minimum 90mm air gap behind the panel is recommended to achieve optimal acoustic performance.

A 10mm Expressed Joint is recommended. It is necessary to use double battens or furring channels at the panel joints to ensure panel is fixed securely.

Atkar's 67mm wide furring channel can also be used. A perimeter wall angle may be required to secure solid infill panels. Flat Black Backing Strips can be used to cover the expressed joint.

CONCEALING FRAMING

To conceal the framing behind the expressed joint we recommend using our QuickStrips, which are flat black backing strips that can be placed under the two panels prior to securing the panel. Adhesive tape can also be used to secure the backing strip if unable to be secured to a furring channel.

SECURE PANEL

Insert the screws at right angles into pre-drilled holes on the panel face, direct into the furring channel or timber batten. Screws should be evenly spaced across the panel, at a maximum distance of 300mm apart, and the distance between screw and panel edge is not to exceed 50mm.

PANEL SCREW SEQUENCE

It is advised to first screw in the centre section of the panels (See figure 1, **A**), followed by the centre of the short edge (**B**), before finally screwing down the long edges (**C**).

We recommend the use of 7 x 40mm Needle Point Screws for fixing to timber or 7 x 25mm Needle Point Screws when fixing to steel under 1mm. Both are available to purchase on our website.

SCREW DECALS

Provided with your panel order is colour matched decal stickers that can be used over the top of the screw head. Make sure panels are clean and free from dust prior to installing.

PANEL CUTTING

Solid panels can be cut to any size on site. Perforated/slotted panels can also be cut on site, preferably in the centre of the panel or between perforations. Cut outs for access panels and other penetrations are possible, although additional care needs be taken.

QuickStyle Accessories (optional)

QuickStrips

- Flat black backing strips for use behind the expressed joint to conceal the framing system behind panels.
- Strip size: 70 x 2400mm.
Approx. 2 – 3 strips required per panel.
- Can be cut on site.



Panel Fixing Screws

- Black Trim Head 7 x 40mm Needle Point Screw – recommended for fixing to timber;
- Black Trim Head 7 x 25mm Needle Point Screw – recommended for fixing to steel under 1mm;
- Minimum 16 fixing screws required per panel. Colour matched screw decal covers provided.



Maximum
Framing Centres
600mm

Maximum Fixing Distance
from Panel edge
50mm

Maximum Fixing
Distance Intermediate
300mm

Expressed
Joint Gap
10mm

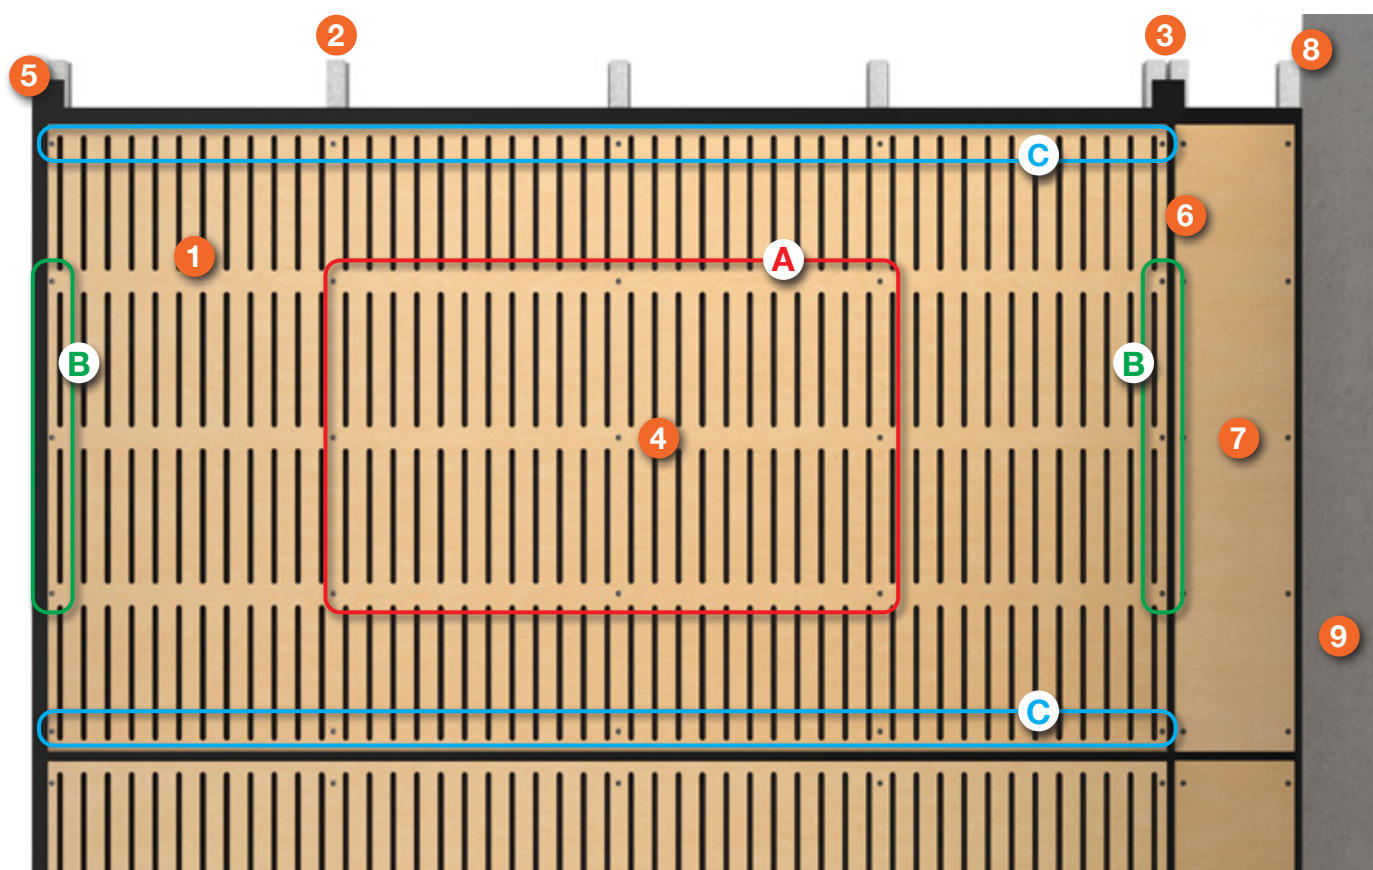


Figure 1: Typical face fix installation with 10mm expressed joint.

- | | |
|---|----------------------------------|
| 1. QuickStyle perforated panel | 6. 10mm expressed joint |
| 2. Furring channel - intermediate | 7. QuickStyle solid infill panel |
| 3. Double furring channel at panel joints | 8. Perimeter Wall Angle |
| 4. Panel screws (screw decals provided) | 9. Wall or Abutment |
| 5. QuickStrips (for concealing joints) | |

PRODUCT INFORMATION

Panel Lead Times

After your online order has been confirmed, your QuickStyle panels will be ready in **10 business days**. We will notify you when they are ready.

If you have selected optional panel edging, the lead time will be 15 business days.

This lead time does not include delivery times, public holidays or business shut down periods.

Warranty

The Atkar Group QuickStyle panel warranty is valid for a period of **10 years** from date of purchase when used in an interior application and is resistant to cracking, splitting, flaking, rotting, splinters or peeling.

Please visit our website for full warranty inclusions and conditions.

Storage & Handling

The following is recommended to ensure unnecessary panel damage. Visit our website for full details.

- Secure panel edges to prevent crushing.
- Do not use ropes to secure panels.
- Keep undercover on a clean, dry and flat surface.
- Do not slide off the stack and lift from on both ends.
- Allow panels to acclimatise in the area in which they are to be installed.

Maintenance & Cleaning

The following guidelines can be used for cleaning panels:

- Remove any marks/dust with a damp cloth and dry.
- Stubborn stains may be removed with a gentle cleaner and a soft cloth.
- Do not use abrasive cleaning chemicals or strong solvents.
- Adhesive tape should never be applied to the panels as this may damage the face.

Fire Certifications

QuickStyle panels have undergone the following fire tests and received the following results. Visit our website to view a copy of these certifications.

Product	Description	Fire Test Result
QuickStyle – Solid panel only	12mm MDF – Fire Retardant	Group 1 Rating
QuickStyle – Perforated & Slotted panels	12mm MDF – Fire Retardant 12mm MDF Black – Fire Retardant	Group 2 Rating

Delivery & Pick Up Options



We offer delivery for your order to most locations or you can select free pick up from Hallam, Victoria.

Delivery costs are based on your delivery location and number of panels ordered and can be found online using our shipping calculator. Regional delivery also available.

Design & Layout Inspiration

To allow your QuickStyle panels to suit the exact sizing of your ceiling or wall, it may be necessary to use solid infill panels in combination with perforated panels.

See below some suggested panel design layouts - although any combination may be used.

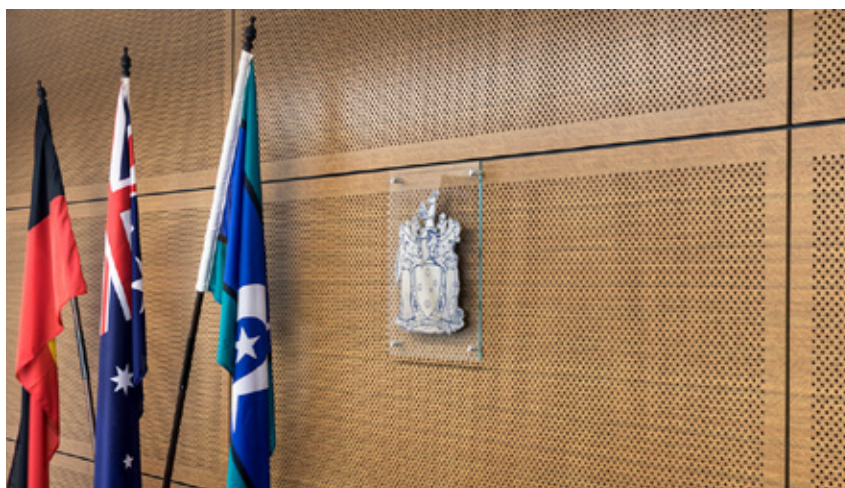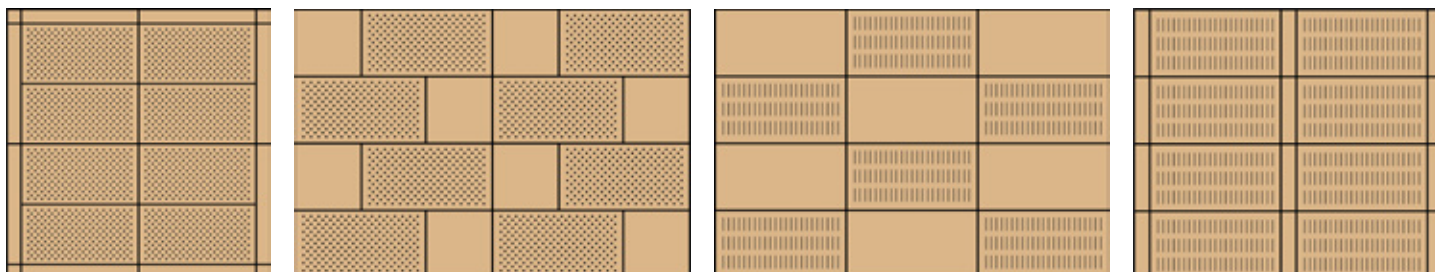

Images for reference only

Design & Layout

How do panels suit my dimensions?

We recommend you use perforated panels for the main wall/ceiling area and then use solid panels as infills, to suit your size requirements. See page 7 for some layout suggestions.

Are there any group ratings for QuickStyle?

When 'MDF - Fire Retardant' is selected, a Group 2 Fire Rating is achieved with perforated and slotted panel patterns and a Group 1 Fire Rating for solid panels.

Are they suitable for walls or ceilings?

QuickStyle panels are suitable for both wall and ceilings.

Can I select options outside of what QuickStyle can offer?

Atkar have other panel options that can be customised to your exact requirements. Go to atkar.com.au to see the full range or contact our Architectural team.

How is QuickStyle different to your other products?

QuickStyle uses the same quality materials to our other products. To reduce costs & lead times, we only offer standard size panels, finishes and patterns and do not do any customisation or shop drawings for this range.

Can panels be cut to size on site?

It is possible to cut panels to size to suit your requirements, although care must be made for perforated or slotted panels. See page 4 for details.

Ordering & Pricing

How much do the panels cost or can I get a quote?

To view all pricing for all QuickStyle panels go to atkar.com.au/quickstyle

What is the lead time?

There is a 10 day lead time for QuickStyle Panels. See page 6 for full details & inclusions.

Can I specify QuickStyle?

QuickStyle can be specified however as a low cost range, there are no shop drawings or samples. Specification wording is available on our website.

How do I order my panels?

Simply go to atkar.com.au/quickstyle, select your panel options and quantities, add to cart and make your payment. Your order will be confirmed via email.

What delivery options are available?

We offer delivery to most locations or you can select free pick up from Hallam, Victoria. See page 6 for details.

Is there a minimum order or return policy?

Minimum order of 10 panels required. Please refer to our Terms & Conditions on our website for full return policy details.

Go to atkar.com.au/quickstyle to see full details, view pricing and to order online.



Head Office

17-19 David Lee Road Hallam VIC 3803 Australia
PO Box 1143 Narre Warren MDC 3805
t 03 9796 3333
e quickstyle@atkar.com.au

atkar.com.au

